

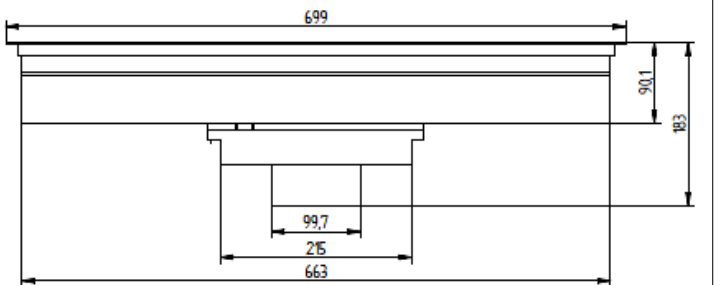
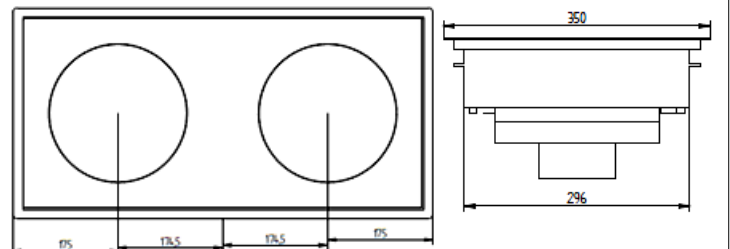



TECHNICAL FEATURES	
External structure	Full stainless steel
Dimensions	700 x 350 x 183 mm
Power	6000W (3000W per zone)
Cooking surface	Vitroceramic glass.
Control panel	Lexan, capacitive or knob control panel
Amp	26A (13Ax2)
Functions	On/Off, knob controlled power levels, 4 digits display or capacitive touches
Power supply	Cable without plug for single-phase or three-phase connection. 220-240V single-phase 32amp 2x230V single-phase 16amp 440V three-phase 16amp AC 50 - 60 Hz
Weight	12.5 kg / 26.5 lbs.
Standards	Complies with European standards for safety of electrical appliances (CE).
Details & Options	Sustain high heat kitchen (50°C) Including a power cord and a washable filter (wash regularly). Pair the units to create 4 or 6 zones: no minimum space requirement between units

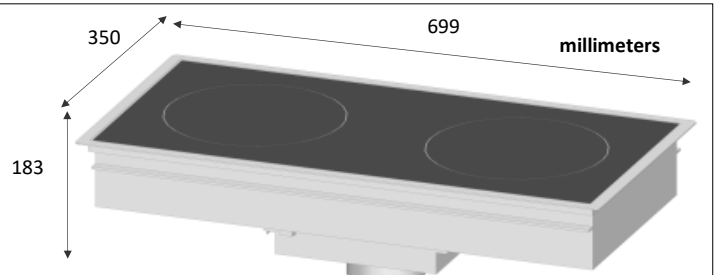

Product cut out dimensions 333 x 682mm

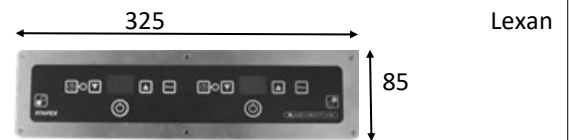

Control cut out dimensions 302 x 60mm

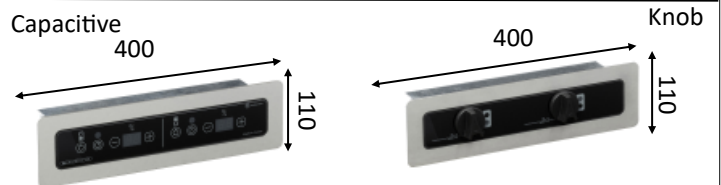

Control cut out dimensions 370 x 72mm


ADVENTYS
Route de Pagny - 21250 Seurre - France
www.adventys.com
sales@adventys.com
T: +33 3 80 20 46 15

Important note

Adventys reserves the right to modify specifications without notice.




Cut-out dimensions lexan control panel

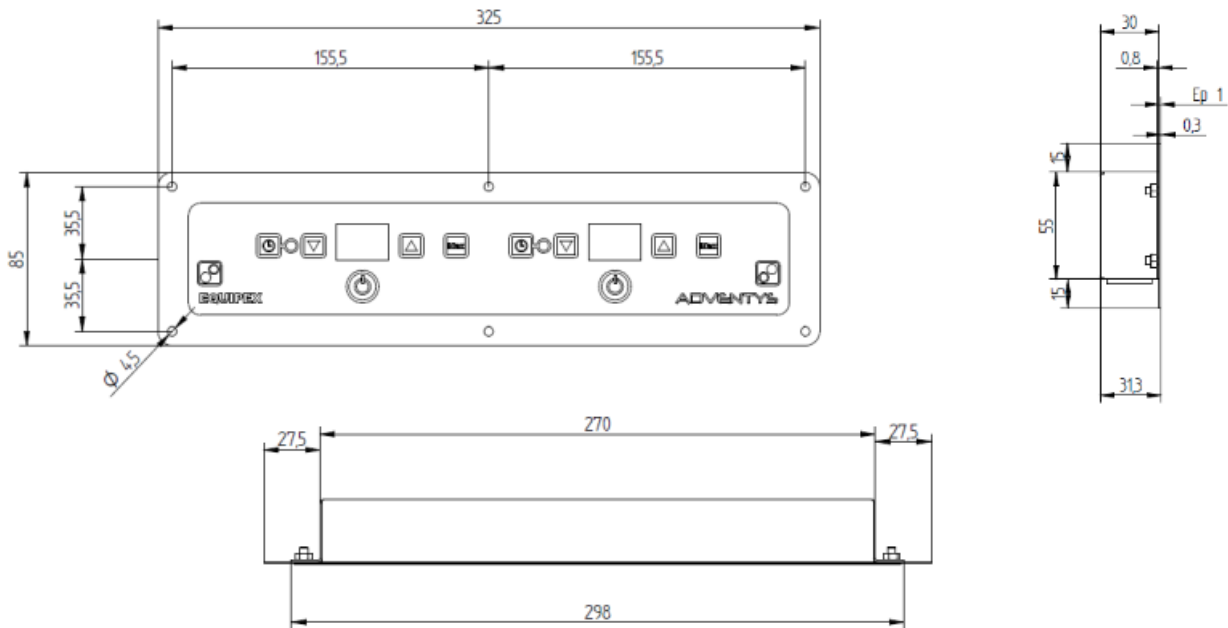

Cut-out dimensions : 60x302mm

Control panel frame (option/not included)

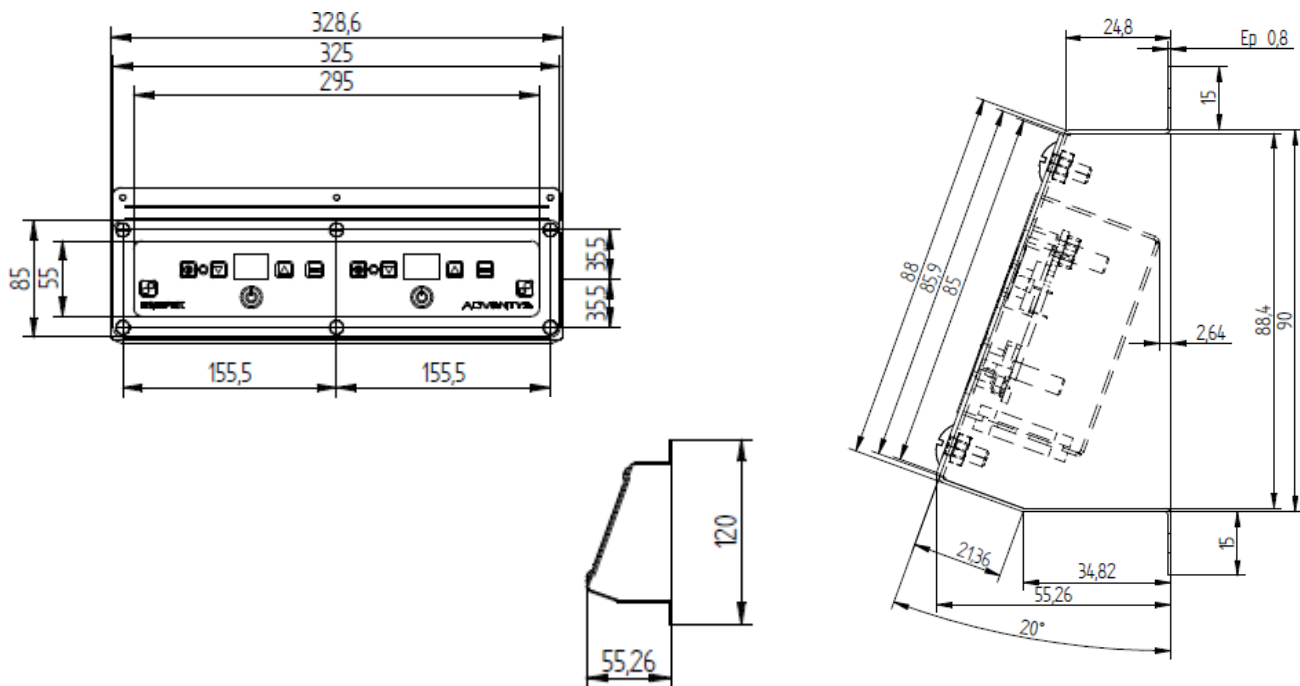

ADVENTYS

Route de Pagny - 21250 Seurre - France

www.adventys.com

Note importante

