



TECHNICAL FEATURES

External structure	AISI 304 stainless steel
Dimensions	800 x 500 x 900
Power	16000 W
Cooking surface	Vitroc ceramic glass.
Control panel	Knob control
Amp	24A
Functions	Incremental encoder and 4 digits display. Power settings (W) or temperature settings (°C). 220 setting temperature levels : from 30 to 250°C.
Power supply	Works between 250 and 490V / 40 and 70Hz. Generator cable length : 1.5m (custom cable in option). 2 power cords H07RNF5G-1.5 with 1.5mm ² section each
Weight	
Standards	Complies with European standards for safety of electrical appliances, for EMC, for Rohs and Intertek NSF & UL standards. Compatible with TERA WATT & SICO-TRONIC energy optimizer
Options & Details	Designed and made in France

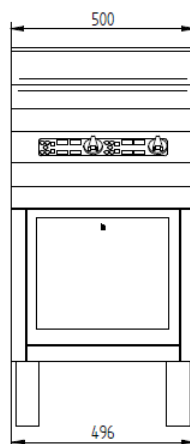

millimeters

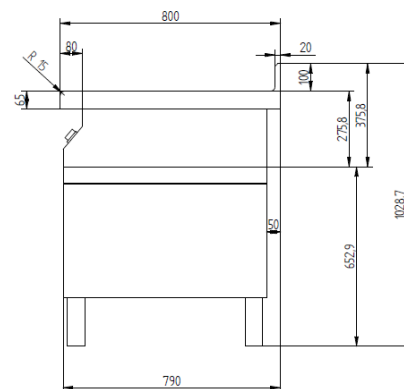

ADVENTYS
Route de Pagny - 21250 Seurre - France
www.adventys.com
sales@adventys.com
T: +33 3 80 20 46 15

Important note

Adventys reserves the right to modify specifications without notice.

