

MULTI-ZONE KIT 8 ZONES


KNL8 8000 - F: ADV1827 - S: ADV1828



	TECHNICAL FEATURES		
	External structure	Stainless steel and vitroceramic glass	
	Dimensions	690x360	
	Power	8000W - 8x1000W	
	Cooking sur- face	Vitroceramic glass.	
	Control panel	Remoted control panel kit. Incremental encoder and 4 digits display. Power settings (W) or temperature settings (°C). 220 setting temperature levels: from 30 to 250°C. Cable length: 1.5m (custom made cable in option).	
		Front to back version : front / back settings. Side by side version : left / right zone settings.	
	Amp	12A	
	Functions	On/Off, manual power setting (+/-) and timer control with 2 digits display (works for both timer and power)	
15,1	Power supply	Remoted generator board kit. Works between 250 and 490V / 40 and 70Hz. Compatible with TERA WATT energy optimizer. Generator cable length: 1.5m (custom cable in option).	
	Weight		
	Standards	Complies with European standards for safety of electrical appliances.	
4,	Details & Options	Compatible with TERA WATT & SICO-TRONIC energy optimizer. Design and made in Burgundy (France).	



millimeters

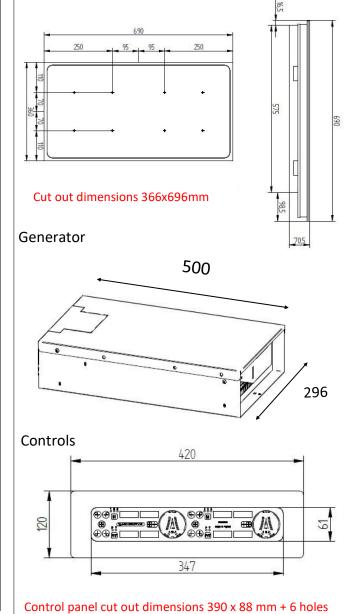

ADVENTYS Route de Pagny - 21250 Seurre - France www.adventys.com sales@adventys.com

T: +33 3 80 20 46 15

